

STEERING WHEELS

All ULTRAFLEX steering wheels meet the EEC directive 94/25 requirements about pleasure boats. All steering wheels are CE marked in conformity with the EN 28848 – EN 29775 and ABYC P22 safety standards

- Thermoplastic antishock material
- Standard 3/4" taper
- Complete with hub
- Meet with the EN 28848 and ABYC P22 standards

HARD TOUCH GRIP

- V32 - 35458 X Black
- V32G - 39282 H Grey
- V33 - 35819 L Black
- V33G - 37495 J Grey

SOFT TOUCH GRIP REDUCED DIMENSION:

- V45 - 37920 H Black
- V45W - 38049 P White
- V45G/W - 39338 J Grey



V32 Ø 13.2" (335 mm)




V32G Ø 13.2" (335 mm)



V33 Ø 13.4" (342 mm)



V33G Ø 13.4" (342 mm)




V32



V45 Ø 11" (280 mm)




V45W Ø 11" (280 mm)




V32



V45G/W Ø 11" (280 mm)

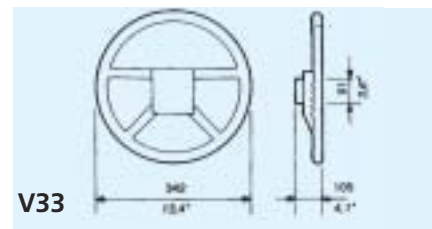

V33

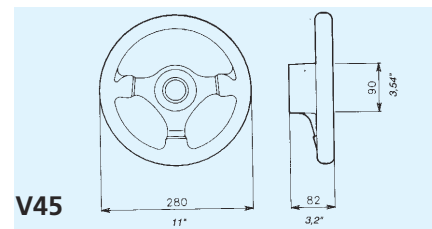

V45

