

ZF 80 A

8° Down angle, direct mount marine transmission.

Maximum rated input: 324kW (435hp)

Available for Pleasure, Light, Medium and Continuous Duty applications.

Description

- Reverse reduction marine transmission with hydraulically actuated multi-disc clutches .
- Suitable for high performance applications in luxury motoryachts, sport fishers, express cruisers etc .
- Robust design also withstands continuous duty in workboat applications .
- Fully works tested, reliable and simple to install .
- Design, manufacture and quality control standards comply with ISO 9001 .
- Compatible with all types of engines and propulsion systems, including waterjets and surface- piercing propellers, as applicable .

Features

- Lightweight and robust aluminum alloy casing (sea water resistant) .
- Case hardened and precisely ground gear teeth for long life and smooth running .
- Output shaft thrust bearing designed to take maximum propeller thrust astern and ahead .
- B/W connection integrated with casing .
- Smooth and reliable hydraulic shifting with control lever for attachment of push-pull cable .
- Suitable for twin engine installations (same ratio and torque capacity in ahead or astern mode) .
- Replaceable oil filter cartridge .
- Compact, space saving design due to 8° down-angle and beveloid gear principle .
- "SUPERSHIFT" clutch control .

Options

- Engine-matched dual stage coupling .
- SAE 2 and SAE 3 bell housings .
- Oil cooler complete with fittings and flexible oil hoses .
- Mounting brackets .
- Propeller shaft flange .
- Control cable bracket for mounting of push-pull cable to the control lever .
- Classification by all major Classification Societies on request .
- SAE «A» Power Take Off .
- Thermostatic valve for better performance of trolling valve in cold sea water .
- Trolling valve (mechanical) for slow-speed drive .
- Electric Trolling .
- Supershift E (with Autotroll and Easidock) .

Pleasure Duty

RATIOS		MAX. TORQUE		POWER/RPM		SAMPLE POWER CAPACITIES						MAX. RPM
'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2800 rpm		3000 rpm		3300 rpm		RPM
1.200	1.200	940	693	0.0984	0.1320	276	370	295	396	325	436	
1.406	1.406	940	693	0.0984	0.1320	276	370	295	396	325	436	4500
1.567	1.567	940	693	0.0984	0.1320	276	370	295	396	325	436	4500
1.962	1.962	940	693	0.0984	0.1320	276	370	295	396	325	436	4500
2.500	2.500	862	636	0.0903	0.1210	253	339	271	363	298	399	4500
2.850	2.850	812	599	0.0850	0.1140	238	319	255	342	281	376	4500

Pleasure Duty Gasoline

RATIOS		MAX. TORQUE		POWER/RPM		SAMPLE POWER CAPACITIES						MAX. RPM
'A' Pos	'B' Pos	Nm	ftlb	kW	hp	4000 rpm		4400 rpm		4800 rpm		RPM
1.200	1.200	940	693	0.0984	0.1320	394	528	433	581	--	--	
1.406	1.406	940	693	0.0984	0.1320	394	528	433	581	--	--	4500
1.567	1.567	940	693	0.0984	0.1320	394	528	433	581	--	--	4500
1.962	1.962	940	693	0.0984	0.1320	394	528	433	581	--	--	4500
2.500	2.500	862	636	0.0903	0.1210	361	484	397	533	--	--	4500
2.850	2.850	812	599	0.0850	0.1140	340	456	374	502	--	--	4500

Light Duty

RATIOS		MAX. TORQUE		POWER/RPM		SAMPLE POWER CAPACITIES						MAX. RPM
'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2100 rpm		2500 rpm		2800 rpm		RPM
1.200	1.200	880	649	0.0921	0.1236	194	259	230	309	258	346	
1.406	1.406	880	649	0.0921	0.1236	194	259	230	309	258	346	4500
1.567	1.567	880	649	0.0921	0.1236	194	259	230	309	258	346	4500
1.962	1.962	880	649	0.0921	0.1236	194	259	230	309	258	346	4500
2.500	2.500	808	596	0.0846	0.1135	178	238	212	284	237	318	4500
2.850	2.850	764	563	0.0800	0.1073	168	225	200	268	224	300	4500

Medium Duty

RATIOS		MAX. TORQUE		POWER/RPM		SAMPLE POWER CAPACITIES						MAX. RPM
'A' Pos	'B' Pos	Nm	ftlb	kW	hp	2100 rpm		2500 rpm		2800 rpm		RPM
1.200	1.200	750	553	0.0785	0.1053	165	221	196	263	220	295	
1.406	1.406	750	553	0.0785	0.1053	165	221	196	263	220	295	4500
1.567	1.567	706	521	0.0739	0.0991	155	208	185	248	207	278	4500
1.962	1.962	706	521	0.0739	0.0991	155	208	185	248	207	278	4500
2.500	2.500	689	508	0.0721	0.0968	152	203	180	242	202	271	4500
2.850	2.850	648	478	0.0679	0.0910	142	191	170	227	190	255	4500

Continuous Duty

RATIOS		MAX. TORQUE		POWER/RPM		SAMPLE POWER CAPACITIES						MAX. RPM
'A' Pos	'B' Pos	Nm	ftlb	kW	hp	1800 rpm		2100 rpm		2400 rpm		RPM
1.200	1.200	612	451	0.0641	0.0859	115	155	135	180	154	206	
1.406	1.406	612	451	0.0641	0.0859	115	155	135	180	154	206	3200
1.567	1.567	588	434	0.0616	0.0826	111	149	129	173	148	198	3200
1.962	1.962	588	434	0.0616	0.0826	111	149	129	173	148	198	3200
2.500	2.500	561	414	0.0587	0.0788	106	142	123	165	141	189	3200
2.850	2.850	525	387	0.0550	0.0737	99	133	115	155	132	177	3200


"A" POS = continuous running position (normally AHEAD). "B" POS = reverse position. B/W = Borg Warner adaptor.

06:40 PM GMT - 25-Sep-05

* Special Order Ratio

ZF 80 A


Dimensions

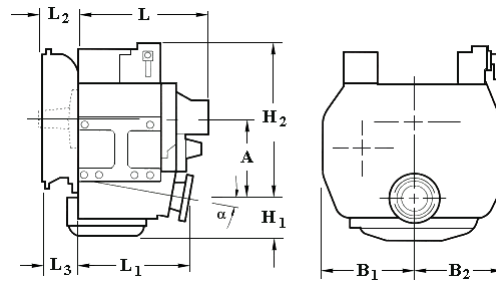

mm (inches)										
Angle	A	B ₁	B ₂	H ₁	H ₂	L	L ₁	L ₂	L ₃	Bell Hsg.
8.0	160 (6.30)	210 (8.27)	210 (8.27)	112 (4.41)	303 (11.9)	374 (14.7)	291 (11.4)	76.0 (2.99)	11.0 (0.43)	3
Weight kg (lb)						Oil Capacity Litre (US qt)				
64.0 (141)						5.00 (5.30)				


SAE Bell Housing Dimensions

SAE No.	A		B		C		Bolt Holes		
	mm	in	mm	in	mm	in	No.	Diameter	
	mm	in	mm	in	mm	in	No.	mm	in
2	447.68	17.625	466.73	18.375	488.95	19.25	12	10.32	13/32
3	409.58	16.125	428.63	16.875	450.85	17.75	12	10.32	13/32



Output Coupling Dimensions

A		B		C		D		Bolt Holes		
mm	in	mm	in	mm	in	mm	in	No.	Diameter (E)	
mm	in	mm	in	mm	in	mm	in	No.	mm	in
146	5.75	121	4.75	76.2	3.00	14.0	0.55	6	16.3	0.64



Duty Definitions

PLEASURE DUTY DEFINITION	Highly intermittent operation with very large variations in engine speed and power
Average engine operating hours limit:	500 hours/year 300 hours/year for mechanical gearboxes
Typical hull forms:	Planing.
Typical applications:	Private, non-commercial, non-charter sport/leisure activities.
LIGHT DUTY DEFINITION	Intermittent operation with large variations in engine speed and power
Average engine operating hours limit:	2500 hours/year (for hydraulic gearboxes smaller than the ZF 650 series, 2000 hours/year).
Typical hull forms:	Planing and semi-displacement.
Typical applications:	Private and charter, sport/leisure activities, naval and police activities.
MEDIUM DUTY DEFINITION	Intermittent operation with some variations in engine speed and power
Average engine operating hours limit:	4000 hours/year. 3500 hours/year for gearboxes smaller than ZF 2000 series and workboat ZF W2700 series.
Typical hull forms:	Semi-displacement and displacement
Typical applications:	Charter and commercial craft (example: crew boats and fast ferries), and naval and police activities.
CONTINUOUS DUTY DEFINITION	Continuous operation with little or no variations in engine speed and power
Average engine operating hours limit:	Unlimited
Typical hull forms:	Displacement.
Typical applications:	Heavy duty commercial vessels, tugs, fishing boats.

Duty Ratings

Ratings apply to marine diesel engines at the indicated speeds. At other engine speeds, the respective power capacity (kW) of the transmission can be obtained by multiplying the Power/Speed ratio by the speed.

Approximate conversion factors:

- 1 kW = 1.36 metric hp
- 1 kW = 1.34 U.S. hp (SAE)
- 1 U.S. hp = 1.014 metric hp
- 1 Nm = 0.74 lb.ft.

Ratings apply to right hand turning engines, i.e. engines having counterclockwise rotating flywheels when viewing the flywheel end of the engine. These ratings allow full power through forward and reverse gear trains, unless otherwise stated.

Contact your nearest ZF Sales and Service office for ratings applicable to gas turbines, gasoline (petrol) engines, as well as left hand turning engines, and marine transmissions for large horsepower capacity engines.

Ratings apply to marine transmissions currently in production or in development and are subject to change without prior notice.

Safe Operating Notice

The safe operation of ZF products depends upon adherence to technical data presented in our brochures. Safe operation also depends upon proper installation, operation and routine maintenance and inspection under prevailing conditions and recommendations set forth by ZF. Damage to transmission caused by repeated or continuous emergency manoeuvres or abnormal operation is not covered under warranty. It is the responsibility of users and not ZF to provide and install guards and safety devices, which may be required by recognized safety standards of the respective country (e.g. for U.S.A. the Occupational Safety Act of 1970 and its subsequent provisions).

Monitoring Notice

The safe operation of ZF products depends upon adherence to ZF monitoring recommendations presented in our operating manuals, etc. It is the responsibility of users and not ZF to provide and install monitoring devices and safety interlock systems as may be deemed prudent by ZF. Consult ZF for details and recommendations.

Torsional Responsibility and Torsional Couplings

The responsibility for ensuring torsional compatibility rests with the assembler of the drive and driven equipment. ZF can accept no liability for gearbox noise caused by vibrations or for damage to the gearbox, the flexible coupling or to other parts of the drive unit caused by this kind of vibration. Contact ZF for further information and assistance. ZF recommends the use of a torsional limit stop for single engine powered boats, wherein loss of propulsion power can result in loss of control. It is the buyer's responsibility to specify this option, which can result in additional cost and a possible increase in installation length.

ZF can accept no liability for personal injury, loss of life, or damage or loss of property due to the failure of the buyer to specify a torsional limit stop. ZF selects torsional couplings on the basis of nominal input torque ratings and commonly accepted rated engine governed speeds. Consult ZF for details concerning speed limits of standard offering torsional couplings, which can be less than the transmission limit. Special torsional couplings may be required for Survey Society Ice Classification requirements.